

EASYGATE SPA



EasyGate SPA: An innovative „Pay to Access“ speedgate designed specifically for the needs of the public facilities market. Clad in elegant yet durable grained stainless steel with tall tempered glass panels and an integrated coin validator that accepts multiple currency types or tokens. EasyGate SPA enables establishments to collect an income stream to keep their services open, clean and in a pleasant state for use by their patrons. Users are provided access by inserting the required amount of coins or tokens into the validator slot that will return excess change similar to a vending machine. EasyGate SPA contains an internal secure locked cash box and can be supplied with an optional printer to provide users with a receipt or coupon.

Application areas: service stations, amusements parks and tourist attractions, public transport, shopping centers, sport stadiums and event arenas.

BENEFITS

- Fully automatic „Pay to Access“ entry system, free exit passage
- Heavy duty rugged structure, mechanisms and cladding
- High security - 1 400 mm (55.12“) high tempered glass barrier panels
 - Prevents jumping over or crawling under
 - Fast opening/closing barrier panels to deter tailgating
- Variable passage widths available
- LCD display with intuitive multi-language navigation icons
- Receipt printer with coupon feature
- Advanced safety system
 - 30 pairs of detection sensors
 - Child-safe design
- Disabled access
 - Economical and space-saving - one gate can serve both disabled access & standard needs
- Advanced monitoring software enables remote insight: fault status, parameter settings, transaction database, reports and various statistics
- Payment method
 - Multi-coin mechanism with change return
 - Up to two nominal currencies accepted at the same time
 - Cashless payment: Visa/MasterCard contactless, NFC, City card



• Visa/MasterCard contactless



• NFC

• City card



Materials and finishes :

- Cabinet sides & top:** brushed stainless steel AISI 304
- Barrier type:** 10 mm (0.39") toughened glass barrier panels
- Side Infill panel:** 8 mm (0.31") toughened tempered glass

Dimensions:

Cabinet height	1 400 mm	(55.12")
Cabinet length	1 200 mm	(47.24")
Cabinet width	180 mm	(7.09")
Barrier height	1 400 mm	(55.12")
Passage width	standard 550 mm	(21.65")
	max. 920 mm	(36.22")



Standard equipment:

- Advanced Patented Magnetic Direct Drive Motor with robust double-brake mechanism
- Security-locked cash box with electronic validator
- LCD screen display to display information and instruction cues
- Internal alarm annunciator and remote alarm outputs
- Employee Card access reader

Optional accessories:

- RFID reader bracket (flush mounted)
- Integration of Cashless payment system
- Lane light
- WAV player
- Wing light / Hinge capping
- Pushthrough feature
- USB convertor / Ethernet convertor
- EasyTouch / TouchPanel / T-MON SW
- SuperCap (emergency power back-up) / Emergency push button
- Alternative surface finishes
- Receipt & coupon thermal printer
- Ramp LT

Safety & Security detection:

- 30 pairs of IR sensors
- Safety & Security levels
- Tailgating / Cross over detection

Operating environment:


- Configuration: Indoor
- Operating temperature: +10°C to +50°C (50°F to 122°F)

Communication interface:

- RS 485 / USB / Ethernet

Drive Mechanism:

- MDD motor with external tooth brake

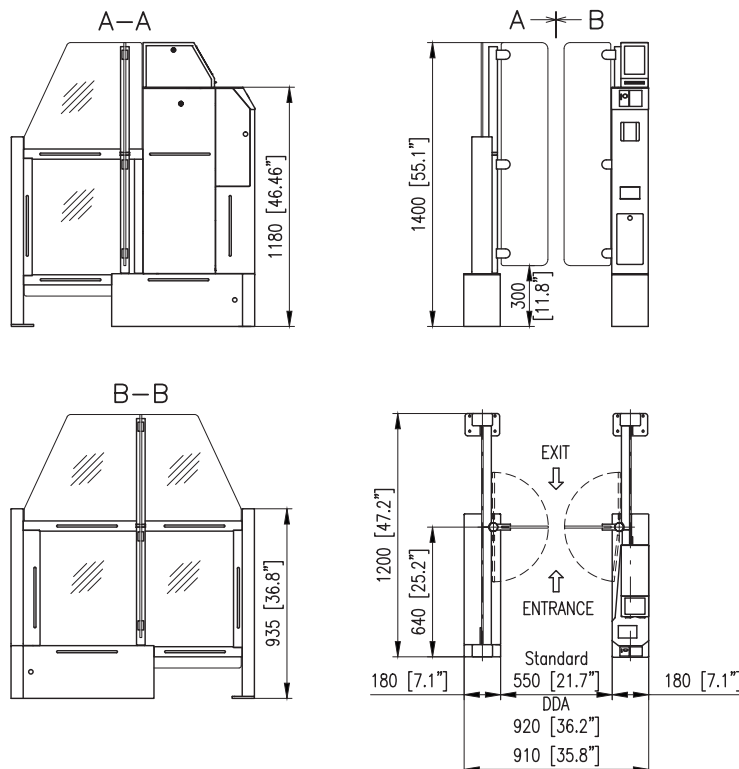

All dimensions in mm (inches).

* Specifications are subject to change without prior notice.